


0100 -
20080

0140 -
20080

0140 -
20380

0140 -
20480

0170 -
20080

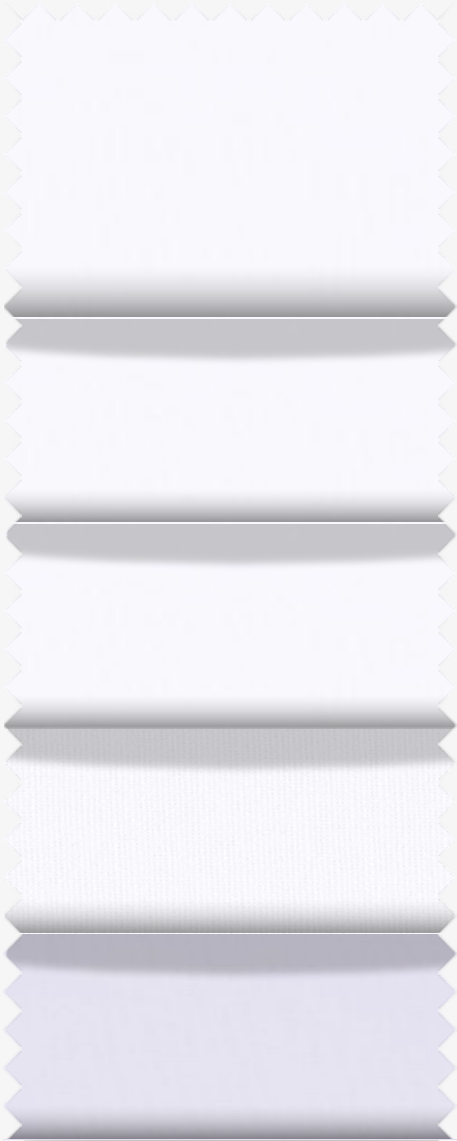

0100 -
28153


0140 -
28153

0170 -
28153

0100 -
29026

0140 -
29026

0170 -
29026

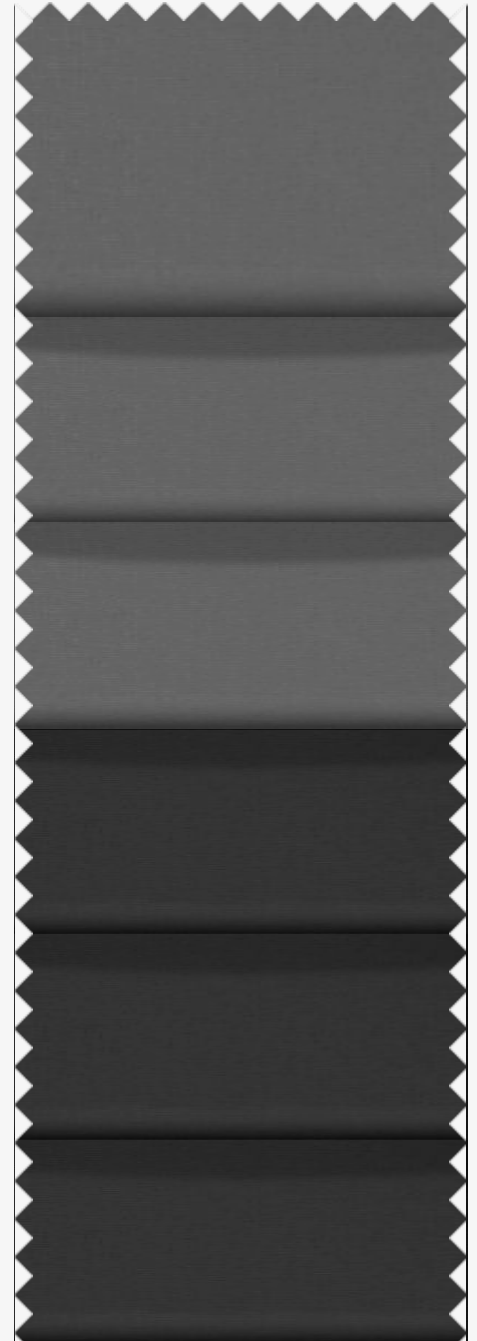

Article information

Application:

One-side fusible interlining for shirt collars and cuffs.

Touch:

20080: soft (finish code 33)

20380: medium stiff (finish code 33)

20480: extra stiff (finish code 33)

Weight:

Approx. 100 / 140 / 170 g/sqm

Width:

Approx. 109-110 cm

Wash shrinkage:

From -1.0 to -2.0%

Heat shrinkage:

From +/-0.0 to -0.5%

Base material:

100% cotton

Colour:

Available in optical white, grey and black

Care instructions:

For garments in which this type of interlining is used, depending on the fabric of the garment, the washing and ironing temperatures should not be exceeded.

Recommended processing data:

1. Temperature (glue line): 160°-170° C.

2. Pressure (specific): 15-30 N/sqcm (2-4 bar)

3. Fusing time: 15-18 seconds

4. There is a great variety in fabric composition and finishing. In order to obtain optimal fusing conditions, we recommend to test all shirt fabrics before starting production. In principle not recommended for shirtings with an easy care / non-iron finish or siliconized fabrics.